

NEW!

CRL MONOLITHIC TEMPERED GLASS RAILING PANELS

For "GRS" TAPER-LOC® Glass Rail Systems




Available Thickness:
1/2" (12 mm), 5/8" (15 mm),
and 3/4" (19 mm) "Rail Glass"



- Clear Tempered and Low Iron Starphire® Glass Types Available for Use With CRL's GRS Glass Railing Systems
- Flat Polished Vertical Edges, Horizontal Seamed Edges Standard
- 48" and 60" (1219 and 1524 mm) Wide Glass Panels in Stock
- Custom Sizes, Fabrication, and Edge Work is Also Available
- Works With CRL's Patented Dry Glazed TAPER-LOC® System
- Designed for Use With CRL's Monolithic Base Shoes
- Also Designed for Use With CRL's New 30% Lighter 8B Series Base Shoe

Designed for interior and exterior glass balustrade applications, CRL's "Rail Glass" is fabricated and tempered in accordance with ANSI Z97.1, and CPSC 16 CFR1201. All "Rail Glass" is available in two stock sizes. Custom sizes, fabrication, and edge work is also available upon request. **NOTE:** Boxing and crating charges will apply. Contact CRL's Railing Technical Sales for more information.

- Proudly Produced in the U.S.A

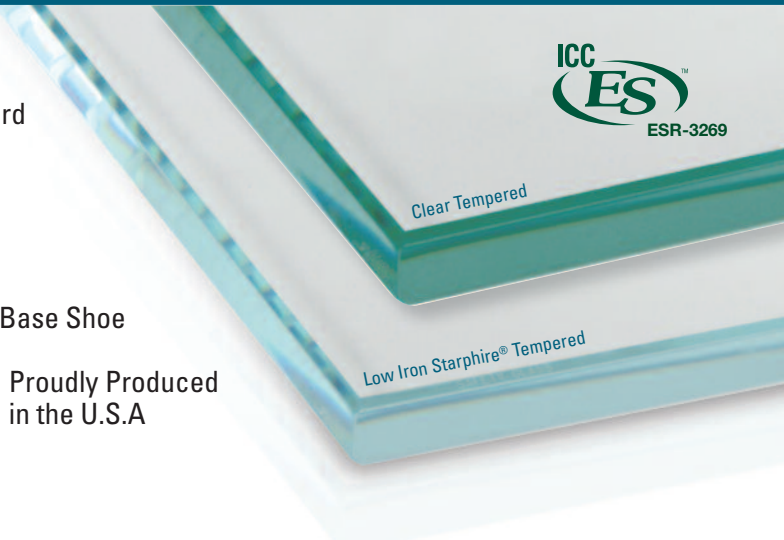

1/2" (12 MM) THICK CLEAR AND LOW IRON TEMPERED GLASS

| CAT. NO. | SIZE | DESCRIPTION |
|----------|--------------------------------|------------------------------|
| MG12C48 | 48" W x 41" H (1219 x 1041 mm) | Clear Tempered |
| MG12L48 | 48" W x 41" H (1219 x 1041 mm) | Low Iron Starphire® Tempered |
| MG12C60 | 60" W x 41" H (1524 x 1041 mm) | Clear Tempered |
| MG12L60 | 60" W x 41" H (1524 x 1041 mm) | Low Iron Starphire® Tempered |
| MG12CC | Custom Size (Specify) | Clear Tempered |
| MG12LC | Custom Size (Specify) | Low Iron Starphire® Tempered |

Minimum order: 1 each. Boxing and crating charges will apply for all orders.
Thickness Range: 0.469" - 0.531" (11.91 - 13.49 mm)
Weight Per Square Foot (Pounds): 6.37

5/8" (15 MM) THICK CLEAR AND LOW IRON TEMPERED GLASS


| CAT. NO. | SIZE | DESCRIPTION |
|----------|-----------------------|------------------------------|
| MG15CC | Custom Size (Specify) | Clear Tempered |
| MG15LC | Custom Size (Specify) | Low Iron Starphire® Tempered |

Minimum order: 1 each. Boxing and crating charges will apply for all orders.
Thickness Range: 0.595" - 0.656" (15.11 - 16.66 mm)
Weight Per Square Foot (Pounds): 7.96

3/4" (19 MM) THICK CLEAR AND LOW IRON TEMPERED GLASS

| CAT. NO. | SIZE | DESCRIPTION |
|----------|-----------------------|------------------------------|
| MG19CC | Custom Size (Specify) | Clear Tempered |
| MG19LC | Custom Size (Specify) | Low Iron Starphire® Tempered |

Minimum order: 1 each. Boxing and crating charges will apply for all orders.
Thickness Range: 0.719" - 0.781" (18.16 - 19.83 mm)
Weight Per Square Foot (Pounds): 9.67



Starphire® is a registered trademark of PPG Industries Ohio, Inc.



C.R. LAURENCE COMPANY
Worldwide Manufacturer and Supplier
Glazing, Architectural, Railing, Construction, Industrial, and Automotive Supplies

Phone: (800) 421-6144 Ext. 7730
Fax: (866) 921-0532
Email: railings@crlaurence.com

crlaurence.com
usalum.com
crl-arch.com