

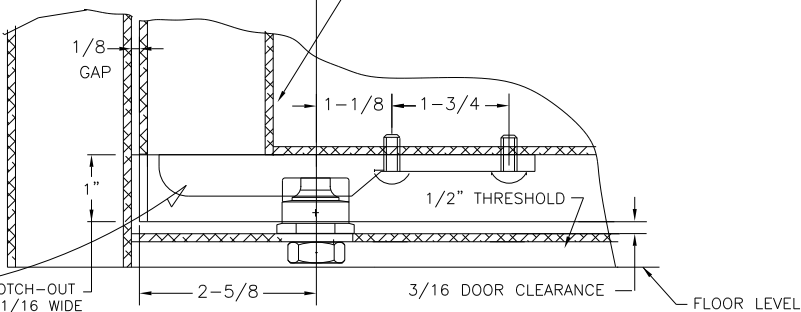
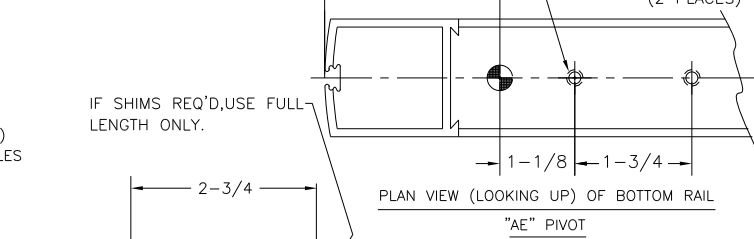
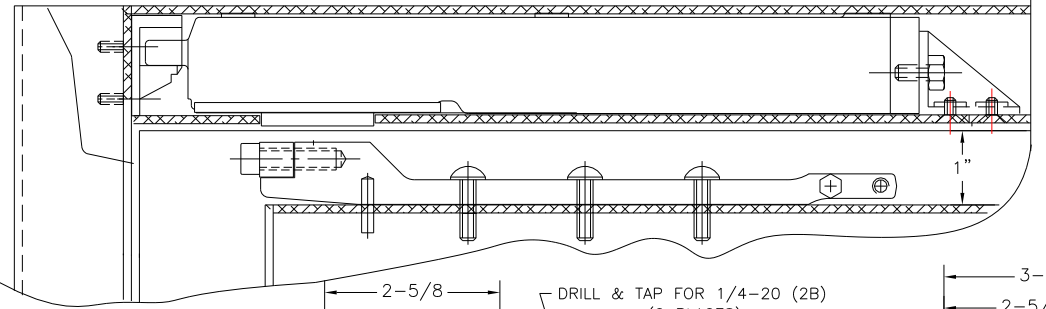
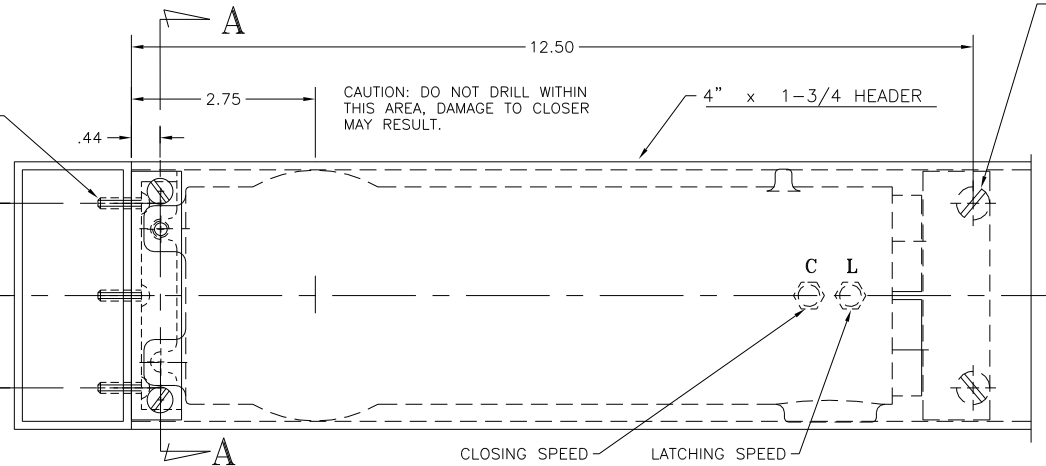
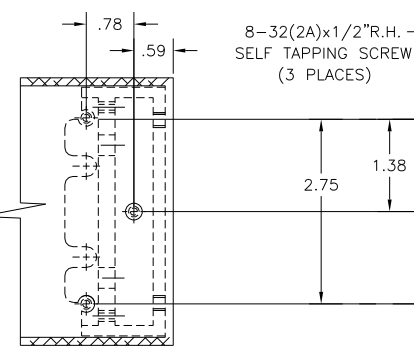



DETAIL OF INSIDE FACE OF PIVOT
SIDE JAMB FOR ATTACHMENT OF
HEAD CHANNEL.

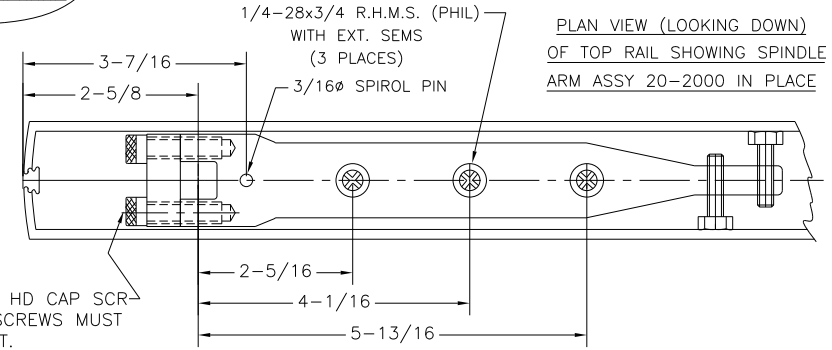



1/4-20(2A)x7/8: F.H.M.S.
(2 PLACES)

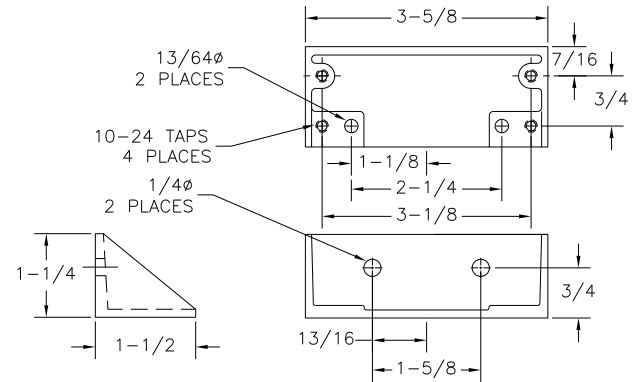

5/16-18 SOC, HD CAP SCR
NOTE: THESE SCREWS MUST
BE TIGHT.

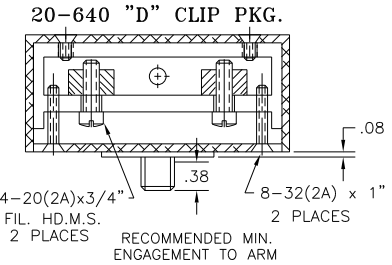

SECTION AA

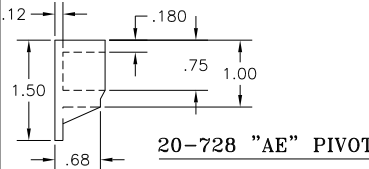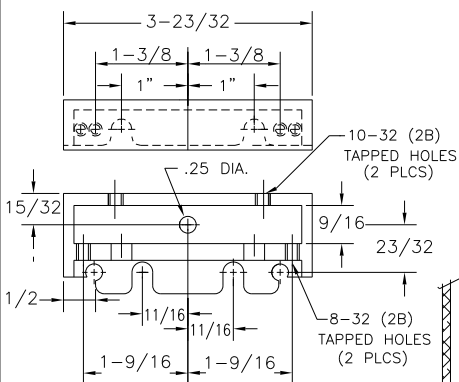

21-101-\"A\" KIT SER.

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE
DECIMAL DIMENSIONS .XX	± .010	APPROVED		
DECIMAL DIMENSIONS .XXX	± .005	CHECKED		
ANGULAR ± °	FRACTIONAL ± 1/64	DRAWN	R.M.	10/91

FILE NO.	10-1123
NEXT ASSY.	21-101-A-KIT SER.
QTY. USED	1

MATERIAL	
FINISH	
HEAT TREAT	

SCALE	NONE
INSTALLATION INSTRUCTION END LOAD ARM \"A\" PIVOT ALUMxALUM	

jackson CORPORATION	
3447 UNION PACIFIC AVE. LOS ANGELES, CALIF. 90023	
SHEET 1 OF 1 SHEETS	REV.
DWG. NO.	10-1123 A