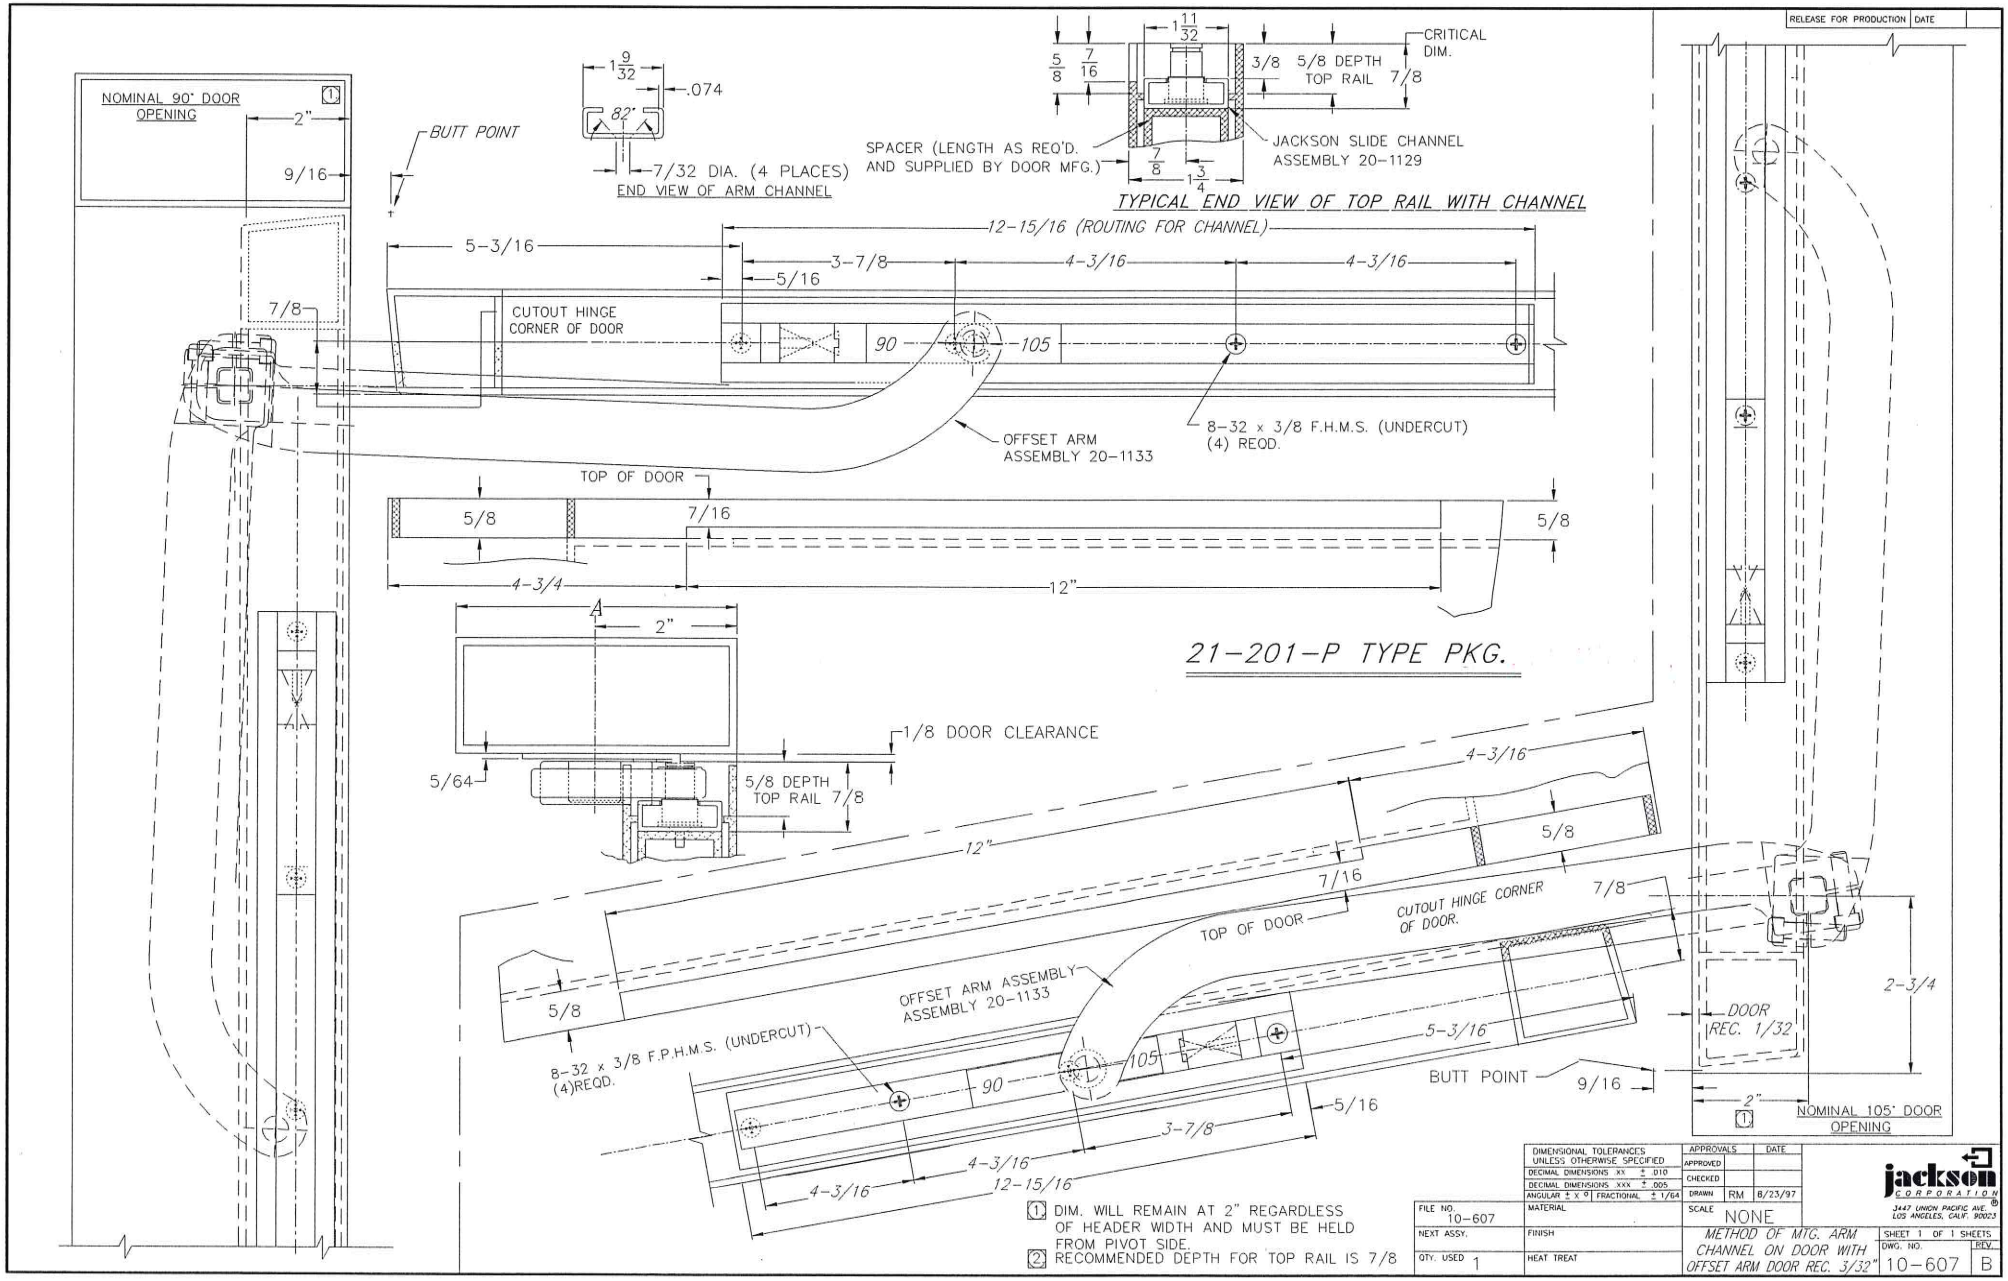

1. DIM. WILL REMAIN AT 2" REGARDLESS OF HEADER WIDTH AND MUST BE HELD FROM PIVOT SIDE.
2. RECOMMENDED DEPTH FOR TOP RAIL IS 7/8