


# **GUIDE TO SEALANTS**

## WATERPROOFING

• 33S ACETIC CURE SILICONE

NOTE: Not for use near insulated glass units with butyl sealant.





Sill to Subsill, End Dams, Screw Heads and Threshold to Door Frame Sealing.

#### JOINT ADHESIVE

RTV408 NEUTRAL CURE SILICONE

NOTE: I.G. butyl contact OK.






Small Joints, End Joints and Buttered Surfaces, Water Diverters and Reglet Fills.

#### PERIMETER


- 95C NEUTRAL CURE SILICONE
- M64 (SMOOTH) MODIFIED POLYURETHANE
- M66 (TEXTURED) MODIFIED POLYURETHANE

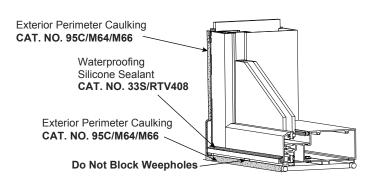

Perimeter Seals, Expansion Joints, Sill and Threshold Beds, Concrete, Wood and Steel Openings.

## **EXPANSION**

• 95C NEUTRAL CURE SILICONE

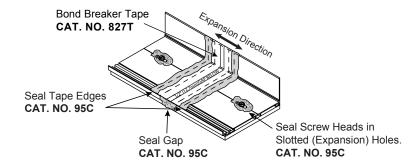

Expansion Joints.

#### STRUCTURAL

ALL STRUCTURAL SEALANTS REQUIRE TESTING AND APPROVAL.

Glass to Glass or Glass to Metal.

crlaurence.com | usalum.com 13